

PROGRAM SCHEDULE



CARBON 2019
LEXINGTON, KY



JULY 14 - 19

- 20** Structural integrity of polyelectrolyte/graphene oxide layer-by-layer assemblies in concentrated aqueous solutions **Szabo**
- 50** The synthesis of micro and nanodiamonds by oxygen-acetylene torch method **Partizan**
- 72** SERS spectra of rhodamine using Ag nanoparticles photodeposited onto graphene oxide thin films **Costa**
- 112** The role of carbon nanotube-graphene hybrid structure for high performance LED **Seo**
- 116** Electrochemically Desulfurized Molybdenum Disulfide (MoS₂) - Graphene Aerogel Composites As Highly-Efficient Electrocatalysts for Hydrogen Production **Gupta**
- 117** Novel Fabrication for Graphene Oxide/Polymer-based Thin Film Composite Membranes with Enhanced Filtration and Antifouling Characteristics **Gupta**
- 118** Graphene-mediated Surface Enhanced Raman Spectroscopy for Detection of Biomolecules and DNA Hybridization **Gupta**
- 151** The impact of sonication on graphene oxide's physicochemical properties and nanofiltration performance of covalently crosslinked membranes **Kandjou**
- 180** Flexible Microsupercapacitors with Flash Lamp Processed Graphene-Carbon Nanotube Electrodes **Kim**
- 237.1** 1 electron paramagnetic resonance in graphene structures **Baitimbetova**
- 243** Graphene reactions with water and carbon dioxide on armchair sites **Oyarzún**
- 359** Hybrid Graphene oxide-Zirconium oxocluster polymer for fluoride removal: Synthesis, characterization and water treatment. **Pérez-Tavares**
- 370** Molecular-Scale Graphene Oxidation and Pitting Dynamics **Schmitt**
- 384** Electronic and magnetic properties of graphene oxide /Fe₂O₃ nanocomposites **Idisi**
- 396** Advanced Bioinspired Membranes from Biological Ion Channel Confined into Polymeric Cylindrical Nanopores for Enhanced Filtration **Gupta**
- 406** HREELS measurements of the phonon dispersion for graphene **Singh**
- 460** DFT study on the conversion of methane to benzene during CVI. **Li**
- 479** Challenges in Graphene Nanopore- (Nanowindow)-based Molecular Separations: A Critical Review **Vallejos-Burgos**
- 490** Method of graphene synthesis in the combined flame **Lesbayev**
- 513** Nitrogen Doped Functionalized Graphene as Sustainable Photocatalyst for Visible Light Induced Overall Water Splitting **Tripathi**
- 526** Green exfoliation of graphene nanosheets based on freezing induced volumetric expansion of carbonated water **Kaur**
- 527** Nature-inspired, Graphene-wrapped 3D MoS₂ Ultrathin Microflower Architecture as a High-Performance Anode Material for Sodium-Ion Batteries **Anwer**
- 533** Electrical properties of MOFs/GO composites **Devautour-Vinot**
- 537** Chemically Hydrogenated Graphene for Solid-State Hydrogen Storage Applications **Morse**
- 540** Low Energy Electron Transparency of Graphene and Doped-Graphene via Electron Energy Analyzer **Belayneh**

- 14** Effect of Filler Size in a Graphene-Anthracene Carbon-Carbon Composite **Vander Wal**
- 28** Creation of nano- and micro- spaces in carbons and loading dissimilar materials by electrospinning **Oshida**
- 65** Synthesis of novel nanocomposite of activated Kaolinite with various proportions of modified carbon nanotube for improved adsorption of heavy metals at very low concentration from water **Yadav**
- 74** Electrospun Lignin-based Carbon Nanofiber Tows **Yi**
- 114** Engineered Nanocomposite Materials Properties through Embedding of Smaller Nanoparticles in a Polymer Matrix **Gupta**
- 143** Preparation of Carbon Nanofiber Using Chlorinated PVC/Isotropic Pitch Mixed Solutions by Electrospinning **Ryu**
- 165** Influence of carbon nanotube fillers on change of mechanical properties of polyimide composite films **Yar-Mukhamedova**

THE IMPACT OF SONICATION ON GRAPHENE OXIDE'S PHYSICOCHEMICAL PROPERTIES AND NANOFILTRATION PERFORMANCE OF COVALENT CROSSLINKED MEMBRANES

Vepika Kandjou^{1*}, Jose M. Munuera², Beatriz Acevedo¹, Juan Ignacio Paredes² and Sonia Melendi-Espina¹

¹ *Engineering, Faculty of Science. University of East Anglia, Norwich, England (UK)*

² *Instituto Nacional del Carbón, (INCAR), CISC, Apartado 73, 33080 Oviedo, Spain*

*Presenting author's e-mail: v.kandjou@uea.ac.uk

Introduction

Fuelled by its ease of fabrication, hydrophilicity and chemical robustness, graphene oxide (GO) is emerging as a promising versatile next generation nanomaterial. This makes it a reasonable graphene substitute in several applications including separation membranes. Prior to fabrication into applicable thin films and membranes via dispersion-needing fabrication techniques, GO is often sonicated to enhance the individuality and dispersion of its nanosheets in aqueous and polar solvent solutions. However, it has been established that sonication comes with the alteration of the physical and chemical features of GO to an extent [1]. This study thus looks co-currently into the impact of preparatory GO sonication durations onto its physicochemical properties together with its impact on the nanofiltration performance of crosslinked GO membranes in water purification.

The establishment of a relation between the sonication duration of GO dispersion and the overall nanofiltration performance of the fabricated crosslinker was mainly significant in deriving the ideal sonication duration. This is further established through key characterisations of differently sonicated GO samples to determine the change in physical and chemical quality content of the samples as the sonication duration increases.

Materials and Methods

GO powder was purchased from Graphenea (product code: C28/GOB02/Pw, Gipuzkoa, Spain). The membranes were supported by fibrous 0.2 μm pore sized, 47 mm diameter poly (acrylonitrile) (PAN) filter substrates from Sterlitech Corporation (Washington, USA). The crosslinker, p-phenylenediamine (PPD powder, product code: P6001) and methylene blue (MB, $\text{C}_{16}\text{H}_{18}\text{ClN}_3 \cdot 3\text{H}_2\text{O}$, >99% purity; product code: M9140) were all purchased from Sigma Aldrich (Haverhill, UK). A bath type sonicator (Fisherbrand FB1505, Elmasonic S30H) was used to prepare samples under different sonication durations (30, 60, 120 and 180 minutes).

Following the PAN substrate pre-treatment, crosslinked membranes were fabricated using the schematic in figure 1;

Membrane performance for each of the fabricated membranes on the other hand was evaluated by the separation of 10 mg/l of methylene blue solution in a homemade lab scale nanofiltration device.

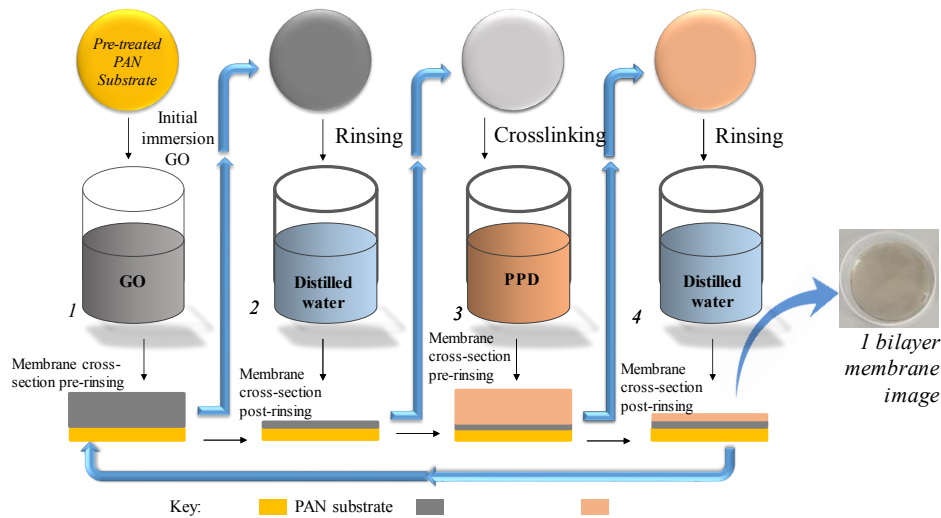


Figure 1. Dip-assisted layer by layer fabrication schematic

Results and Discussion

A general relation between sonication duration and change in the physicochemical properties of GO was established. An alteration of the epoxy and carboxylic functional groups composition in GO was also observed with increasing sonication duration. Physically, a reduction in lateral size and aspect ratio of the fabricated GO nanosheets was observed with increased sonication time. The influence of sonication onto the performance of the membranes is apparent and up to 98.2% rejection of MB was achieved at longer sonication time relative to only 59.8% for the unsonicated samples (figure 2).

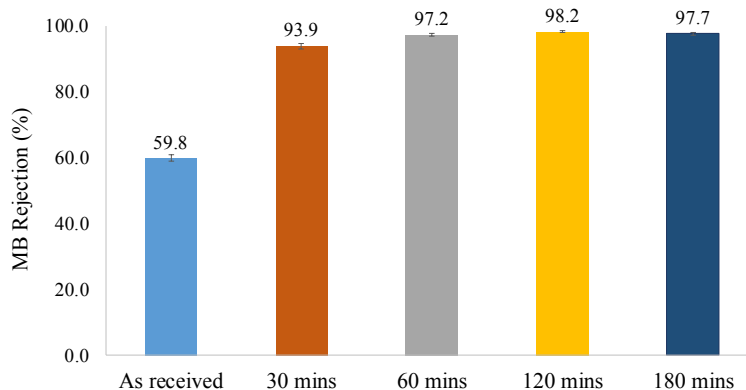


Figure 2. Methylene blue rejection of the differently sonicated membranes

Conclusions

Successful fabrication of differently crosslinked membranes to determine optimum sonication duration was achieved. Membrane performance increased with an increase in sonication duration plateauing at 60 minutes of sonication.

Acknowledgment

Special thanks the Botswana Government's Top Achievers Scholarship Programme for offering a Scholarship (100159844RA2 – TR. 163096) that aided the carrying out of this work.

References

1. J. Kim, et al, "Impact of size control of graphene oxide nanosheets for enhancing electrical and mechanical properties of carbon nanotube-polymer composites," *RSC Adv.*, vol. 7, no. 48, pp. 30221–30228, 2017.