



ISSUE 79  
December 2013

Editorial .....1

Bioplastics via Microwave Pyrolysis of Wastes .....1


Nanomicro Project: Microwaves in the 3D Printing Industry .....5

Events .....8

An Afterthought: Microwaves and Biofuel .....9

Ampere Disclaimer .....10

## BIOPLASTICS VIA MICROWAVE PYROLYSIS OF WASTES

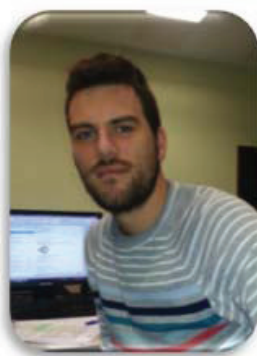

**Daniel Beneroso**  
*Group of Microwaves and Carbons Applied to Technology (MCAT)*  
Consejo Superior de Investigaciones Científicas (Spain)



**J. Ángel Menéndez**  
*Group of Microwaves and Carbons Applied to Technology (MCAT)*  
Consejo Superior de Investigaciones Científicas (Spain)


The need for alternative materials is generally accepted because of the finite sources of fossil reserves. For that reason, bioplastics production is a industry niche that is being developed in an attempt to rise above the non-degradability problem of

petrol-derived plastics. In this sense, plastic solids are produced globally to a level of 245 MT every year from oil and gas; therefore, it is evident that new alternative synthesis routes to petrol-based plastics are necessary, such as the microwave pyrolysis




of biomass to produce syngas (CO + H<sub>2</sub>), as discussed below, followed by its microbial fermentation as depicted in Fig. 1. Such

process has become a promising industrial procedure [1].

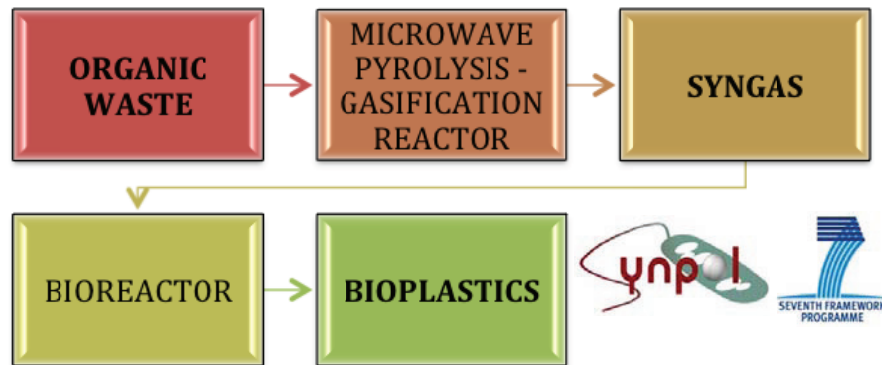

**Figure 1.** Schematic platform of organic waste pyrolysis integrated with syngas fermentation to bioplastics developed by the EU-funded SYNPOL project (<http://www.synpol.org>)

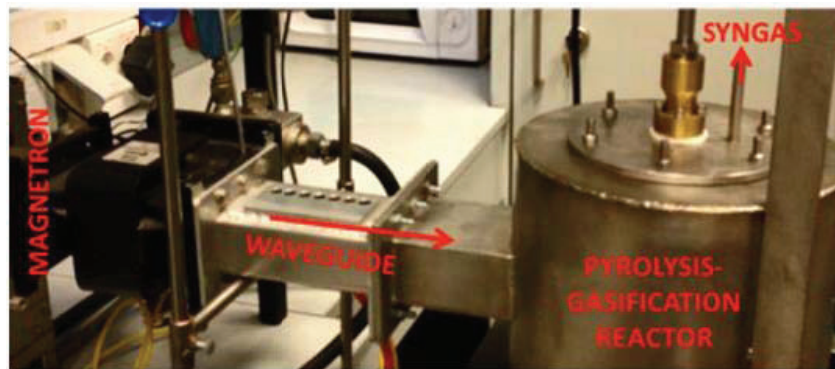

**Figure 2.** Microwave pyrolysis technology developed by MCAT (<http://www.incar.csic.es/mcat>)

In order to make the production of bioplastics a competitive process, organic waste streams could have the potential of reducing drastically the cost associated to the process by a 30-50% if they are used instead of refined feedstock [2]. The SYNPOL project is currently working on this way and will enable the EU to lead worldwide the syngas fermentation technology for waste valorization and sustainable biopolymer production.

Microwave induced pyrolysis has the potential to convert, in a very effective way, the organic waste feedstock into syngas (Fig. 2). Microwave heating mechanism is volumetric; thus it is clear that it should yield quite different products. The microplasmas phenomenon, which takes place when microwaves irradiate a carbonaceous residue, let the temperature rise up to 1000 °C in very confined and tiny spaces within the bulk and last for a fraction of second. However, the bulk temperature



remains at much lower temperature depending on the microwave power. Hence, this pseudo-catalytic effect allows a significant thermal cracking of the volatiles given off, leading to thermodynamically more stable compounds in those conditions, such as CO and H<sub>2</sub> instead of CO<sub>2</sub> or light hydrocarbons [3].

Furthermore, due to the volumetric nature of microwave heating, this may favour heterogeneous reactions between the gas released and the carbonaceous waste, which in turn might well increase the concentration of valuable products for bioplastics production such as CO. Likewise to conventional pyrolysis, different product fractions are obtained in the microwave pyrolysis as depicted in Fig. 3.




**Figure 3.** Products from the microwave pyrolysis: a) oil, b) solid char and c) syngas

In fact, our process allows recycling of carbonaceous solid char from the pyrolysis of the biowastes, as is mixed with the biowaste to be pyrolysed. This is because organic residues are known to be transparent to microwaves but the char is microwave absorbent, so that it easily reaches high temperature when irradiated

with microwaves (Fig. 4). The biowaste is, then, heated up by conduction.

In addition, the char also acts as reactant since this can be gasified with CO<sub>2</sub> and H<sub>2</sub>O, resulting from the biowaste volatiles evolved, to yield more syngas. This reaction pathway may be promoted by the ash metallic content existing in the char, such as K, Na, Ca, Fe or Mg.

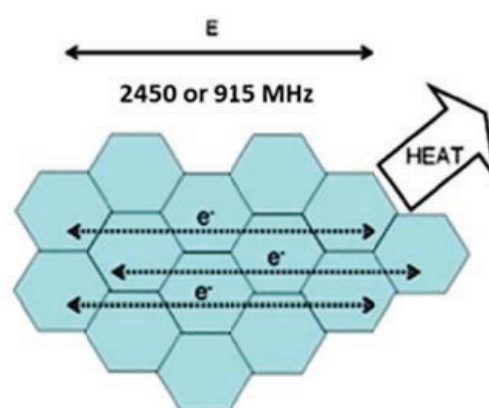

**Figure 4.** Delocalised  $\pi$ -electrons in carbon materials cannot couple to the changes of phase of the electric field and energy is dissipated in the form of heat [4]

Using this technology, developed in our research group MCAT, we have been able to exploit the potential benefits of microwave heating applied to the pyrolysis of a municipal solid waste. For instance, Fig. 5 compares the fraction yields resulting from this process at a relatively low temperature.

Gas yield is well improved by means of microwave pyrolysis at 400 °C; this result has been found to be similar at higher temperatures. Regarding to the gas production per biowaste feedstock, conventional pyrolysis at 400 °C leads to 0.08 m<sup>3</sup>kg<sup>-1</sup> (0.36 m<sup>3</sup>kg<sup>-1</sup> at 800 °C), whereas microwave pyrolysis gives 0.40 m<sup>3</sup>kg<sup>-1</sup> (0.68 m<sup>3</sup>kg<sup>-1</sup> at 800 °C), which evidences the superiority of the last one to be taken into account in the production of bioplastics by the process mentioned above.



In addition, it is important to note that there is a significant decrease in the oil yield, which may indicate that these oils from the pyrolysis might have been cracked

into incondensable gas. As the solid yield also decreases, gasification of the char could be taking place.

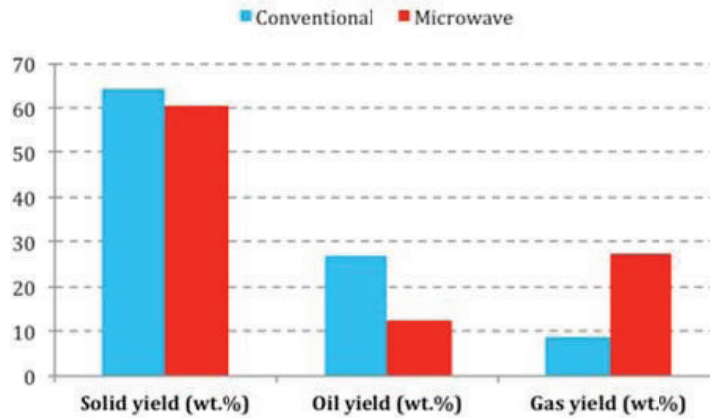


Figure 5. Fraction yields from the pyrolysis of municipal solid waste at 400 °C

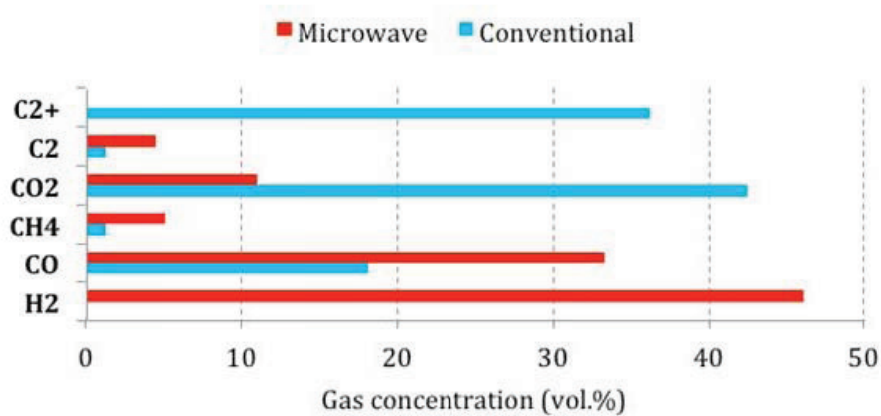


Figure 6. Influence of the heating method on the gas fraction composition at 400 °C

Conversely, Fig. 6 shows the gas fraction composition when this residue is subjected to both microwave and conventional heating at 400 °C. No hydrogen production is detected by conventional pyrolysis at 400 °C. Nevertheless, its concentration reaches 46 vol.% if microwave radiation is used.

Moreover, CO concentration from microwave heating is nearly two times higher and C<sub>2</sub>+ hydrocarbons are not produced. Regarding to the production of bioplastics by means of syngas fermentation, maximizing both gas and syngas production would be the target to

cope with and this is undoubtedly achieved with microwave pyrolysis as previously reported in countless studies [5, 6].

To sum up, since biocatalyst used to produce bioplastics do not seem to require a fixed CO/H<sub>2</sub> ratio [7] coupled with the fact that microwave heating seems to provide much better energy efficiencies at higher scale [8], microwave induced pyrolysis could be the way forward to be considered for sustainable bioplastics production from waste.



**References:**

1. Choi, D., et al., A Techno-economic Analysis of Polyhydroxyalkanoate and Hydrogen Production from Syngas Fermentation of Gasified Biomass. *Applied Biochemistry and Biotechnology*, 2010. 160(4): p. 1032-1046.
2. Shen, L., J. Haufe, and M.K. Patel, Product overview and market projection of emerging bio-based plastics PRO-BIP 2009, in Report for European Polysaccharide Network of Excellence (EPNOE) and European Bioplastics2009.
3. Menéndez, J.A., et al., Evidence of Self-Gasification during the Microwave-Induced Pyrolysis of Coffee Hulls. *Energy & Fuels*, 2006. 21(1): p. 373-378.
4. Menéndez, J.A., et al., Microwave heating processes involving carbon materials. *Fuel Processing Technology*, 2010. 91(1): p. 1-8.
5. Beneroso, D., et al., Microwave pyrolysis of microalgae for high syngas production. *Bioresource Technology*, 2013. 144(0): p. 240-246.
6. Domínguez, A., et al., Bio-syngas production with low concentrations of CO<sub>2</sub> and CH<sub>4</sub> from microwave-induced pyrolysis of wet and dried sewage sludge. *Chemosphere*, 2008. 70(3): p. 397-403.
7. Mohammadi, M., et al., Bioconversion of synthesis gas to second generation biofuels: A review. *Renewable and Sustainable Energy Reviews*, 2011. 15(9): p. 4255-4273.
8. Budarin, V.L., et al., Use of green chemical technologies in an integrated biorefinery. *Energy & Environmental Science*, 2011. 4(2): p. 471-479.